


# Technical Specification Information

## REXUS 24-inch Manhole Cover and Frame

Manhole cover and frame shall be called REXUS or approved equal. Cover and frame shall be manufactured from Ductile Iron. Covers shall be hinged and incorporate a 90-degree blocking system to prevent accidental closure. Covers shall be one-man operable using standard tools and shall be capable of withstanding a test load of 80,000 lbs. The cover shall incorporate a spring bar locking system, which automatically activates when the cover is closed. Additional security features to include a device to prevent the cover from being completely removed from the frame. This device shall be capable of being deactivated if required. Frames shall be circular, incorporate a seating ring, and have a nominal 24-inch clear opening. Frame depth shall not exceed 4 inches, and the flange shall incorporate bedding slots and bolt holes. All components shall be black coated. Frame weight: 84 lbs. Cover weight: 91 lbs. Total weight: 155 lbs. REXUS is available from **CertainTeed, Tel: (877) 351-3323; Fax: (877) 351-3320**

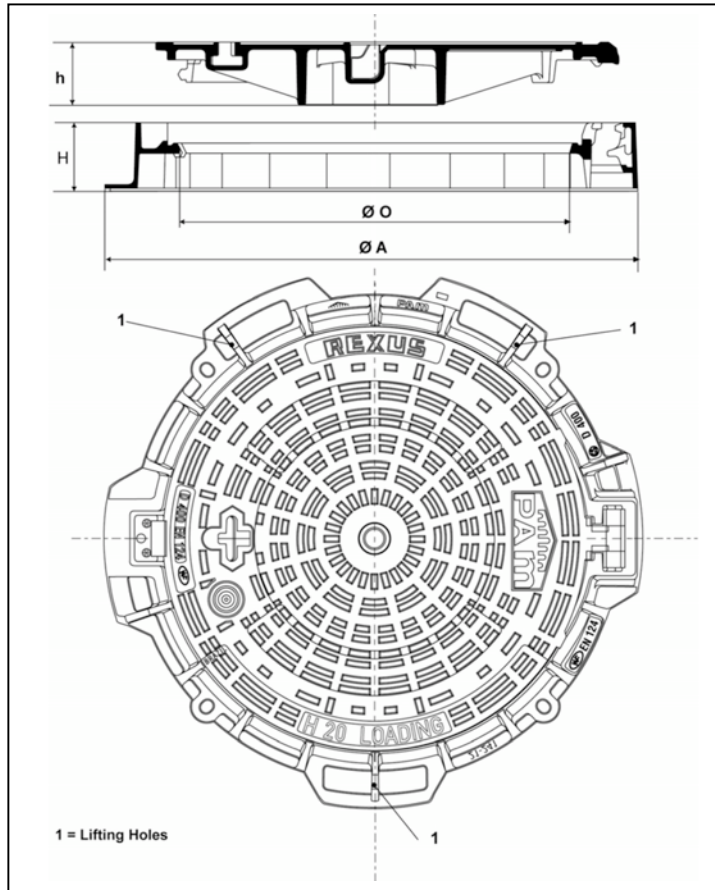

A inches	O inches	H inches	h inches	Reference	Total Weight lbs	Cover Weight lbs
33 ¼	24	4	3 ¾	CDRU60EH	155	91



### For more information contact:

- Your authorized PAM access covers and gratings distributor.
- U.S. headquarters: 877.351.3323; fax 877.351.3320.
- Or visit [www.certainteed-pamcovers.com](http://www.certainteed-pamcovers.com).

**CertainTeed**

CTPAM-0022-5M-SGCS-SO