


Technical Specification Information

PAMREX 24-inch Manhole Cover and Frame (Retrofit Badge)

Manhole cover and frame shall be called PAMREX or approved equal. Cover and frame shall be manufactured from Ductile Iron in a foundry fully certified under the requirements ISO 9000:2000. Product shall be fully tested in road conditions and have been utilized in for over 2 years in road applications. Product design will require that covers are hinged and incorporate a 90-degree blocking system to prevent accidental closure. Cover will allow automatic release of back pressure. Frame shall come complete with an open hinge box and a hinge infiltration plug. Covers shall be one-man operable using standard tools and shall be capable of withstanding a test load of 120,000 lbs. Covers shall be capable of receiving a retrofit badge through use of a punchout design. Frames shall be circular and shall incorporate a seating ring capable of withstanding surface water inflow and absorbing shock from routine traffic. Product will be available in a 24-inch clear opening. The frame depth shall not exceed 4 inches, and the flange shall incorporate bedding slots and bolt holes. All components shall be black coated. Frame weight: 73 lbs. Cover weight: 122 lbs. Total weight: 195 lbs. All product shall meet the requirements of EN124:1994. PAMREX is available from **Porter Products, (352) 589-5888 phone, (352) 589-5525 fax.**

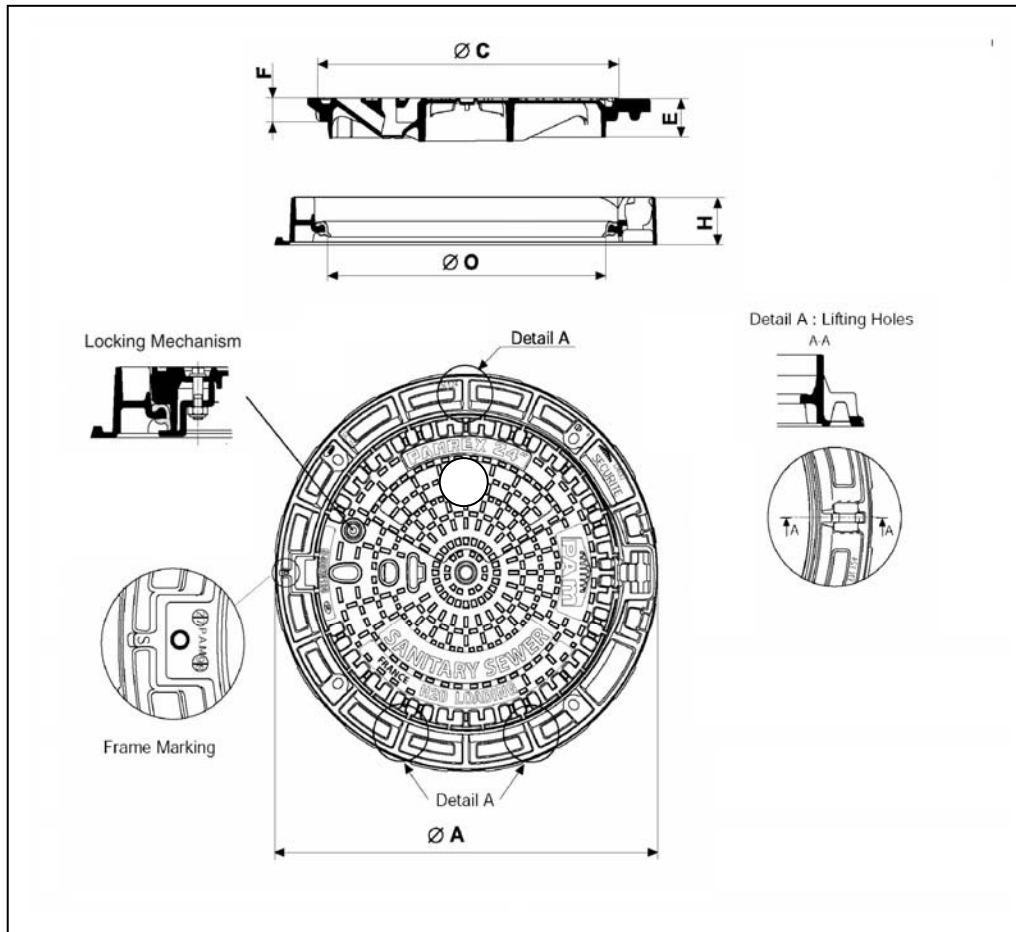

Model	A inches	C inches	E inches	F inches	H inches	O inches	Reference	Total Weight lbs	Cover Weight lbs
Non ventilated	33 ½	26 ½	3 ½	2	4	24	CDPA60EHSSE	195	122



For more information contact:

- Your authorized PAM access covers and gratings distributor.
- U.S. headquarters: 877.351.3323; fax 877.351.3320.
- Or visit www.certainteed-pamcovers.com.



CTPAM-0037-.5M-SGCS-SO