


Technical Specification Information

PAMREX 36-inch Manhole Cover and Frame - Retrofit

Manhole cover and frame shall be called PAMREX or approved equal. Covers and frames shall be manufactured from Ductile Iron in a foundry fully certified under the requirements ISO 9000:2000. Covers shall be dually hinged and incorporate a 90-degree blocking system to prevent accidental closure and come complete with hinge infiltration plugs. Covers shall be one-man operable using standard tools and shall be capable of withstanding a test load of 120,000 lbs. Covers shall be capable of receiving a retrofit badge through use of a punch out design. Frames shall be circular, incorporate a seating ring and be available in a nominal 36-inch clear opening. Covers will be locked as standard and unit will complete with gas strut to aid opening and closing. The frame depth shall not exceed 6 inches, and the flange shall incorporate bedding slots and bolt holes. All components shall be black coated. Frame weight: 125 lbs. Cover weight: 205 lbs. Total weight: 330 lbs. PAMREX is available from:

Porter Products. Eustis. FL PH (352-589-5888 Fax (352) 589-5525

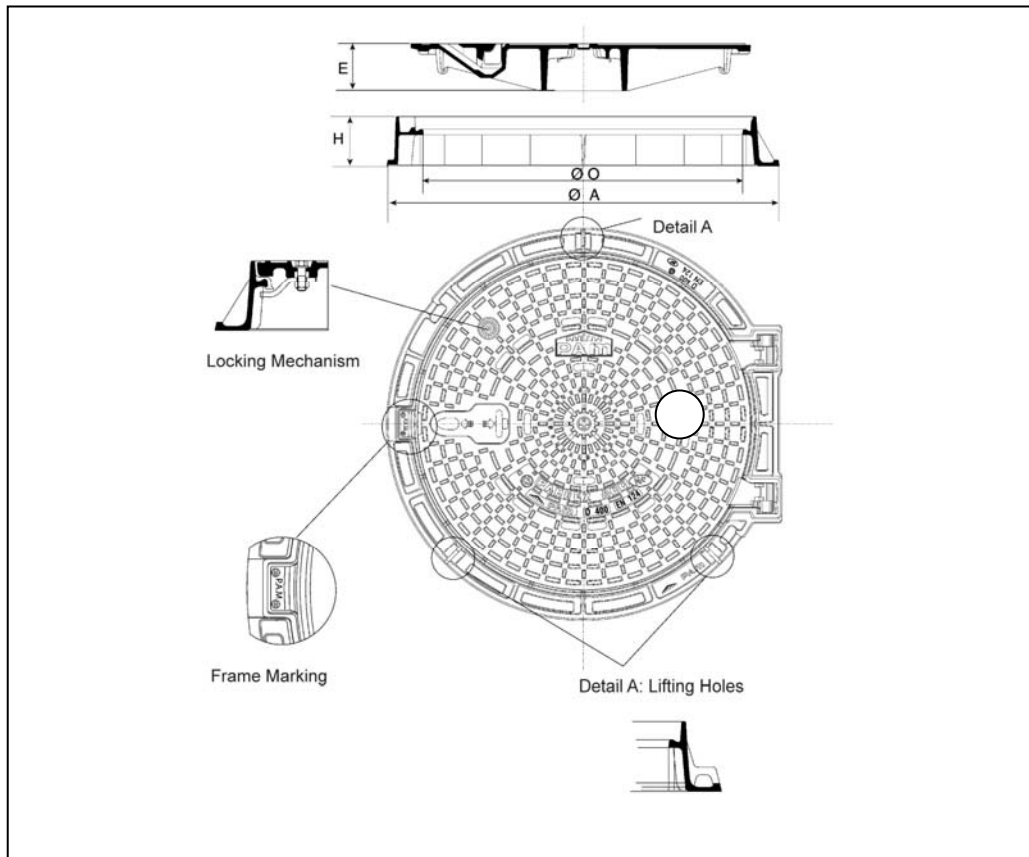

Model	A inches	E inches	H inches	O inches	Reference	Total Weight lbs	Cover Weight lbs
Non-ventilated	44	4 ½	6	36	CDPA90EH	330	205



For more information contact:

- Your authorized PAM access covers and gratings distributor.
- U.S. headquarters: 877.351.3323; fax 877.351.3320.
- Or visit www.certainteed-pamcovers.com.



CTPAM-0019-.5M-SGCS-SO